


TOVO



BURLEIGH SHORT

DESCRIPTION	Surface mounted downlight with short barrel
CODES	3450
FINISHES	White, Black, Copper, Brass, Stainless Steel, Custom
COLOUR TEMP	2700K, 3000K
BEAM ANGLE	24, *38, 60 36 (GU10)
CRI	≥90
LUMEN OUTPUT	527Lm 650Lm (GU10)
WATTAGE	5W 7,5W (GU10)
FIXTURE VOLTAGE	24V DC Constant Voltage 240V AC (GU10)
DIMMING	Based On Driver and Voltage Selection
DRIVER	Remote Driver Required for 24V DC Selection GU10 Lamp Provided for 240V AC Selection
DRIVER OPTIONS	Non-Dim, Phase, Touch, DALI
IP RATING	IP66

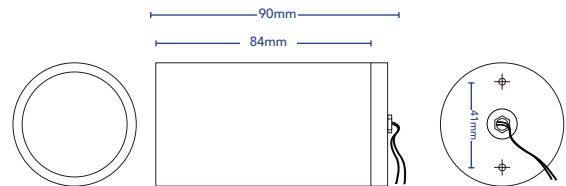

Notes:
*38 degree beam angle as a standard
All data stipulated are nominal values based on 2700K with accuracy of +/- 5%.



WHITE



BLACK



COPPER



BRASS



STAINLESS
STEEL



CUSTOM

BURLEIGH SHORT

MANUFACTURING OPTIONS

FIXTURE				DRIVER	
CODE	FINISH	CCT	BEAM ANGLE	VOLTAGE	DIMMING
3450	WH - White	27 - 2700K	24 - 24° Narrow	24V - 24V DC	ND - Non-Dim
	BLK - Black	30 - 3000K	38 - 38° Medium		PH - Phase Dim
	CU - Copper		60 - 60° Wide		TH - Touch Dim
	BR - Brass				DA - DALI
	SS - Stainless Steel				
CF - Custom Finish					
		CCT	BEAM ANGLE	VOLTAGE	DIMMING
		27 - 2700K	36 - 36° Medium	240V - 240V AC (GU10)	ND - Non-Dim
		30 - 3000K			PH - Phase Dim

Example Code: 3450_CU_27_38_24V
