

## AIRLIE

DESCRIPTION Mini Adjustable Garden Spike

CODES 4590

FINISHES Black,Copper, Brass, Stainless Steel, Custom


COLOUR TEMP 2700K, 3000K BEAM ANGLE 38

CRI ≥90 LUMEN OUTPUT 420Lm WATTAGE 4W

FIXTURE VOLTAGE 24V DC Constant Voltage DIMMING Based On Driver Selection DRIVER Remote Driver Required DRIVER OPTIONS Non-Dim, Phase, Touch, DALI

IP RATING IP66

Notes: All data stipulated are nominal values based on 2700K with accuracy of +/- 5%.

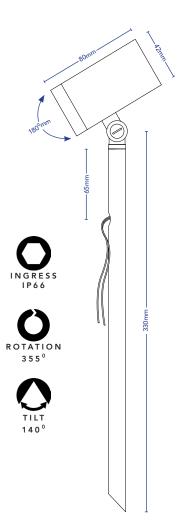

## MANUFACTURING OPTIONS

FIXTURE						DRIVER
CODE	FINISH	SPIKE	ССТ	BEAM ANGLE	VOLTAGE	DIMMING
4590	BLK - Black	<b>S3</b> - 300m	<b>27</b> - 2700K	<b>38</b> - 38° Medium	24V - 24V DC	ND - Non-Dim
	CU - Copper	<b>\$6</b> - 600mm	<b>30</b> - 3000K			PH - Phase Dim
	BR - Brass	<b>S9</b> - 900mm				TH - Touch Dim
	SS - Stainless Steel	SC - Custom length				DA - DALI
	CF - Custom Finish					

Example Code: **4590\_CU\_S6\_27\_38\_24V** 

Notes: Phase dimable drivers are not recommended for 24V DC fixtures due to possible flickering, but can be provided upon request.

## **ACCESSORIES**

