


TOVO



BYRON

DESCRIPTION	Recessed In-ground Uplight or Wall Mounted Path light
CODES	4624
FINISHES	Black, Copper, Brass, Stainless Steel, Custom
COLOUR TEMP	2700K, 3000K
BEAM ANGLE	20
CRI	≥90
LUMEN OUTPUT	254Lm
WATTAGE	4W
FIXTURE VOLTAGE	24V DC Constant Voltage
DIMMING	Based On Driver and Voltage Selection
DRIVER	Remote Driver Required for 24V DC Selection
DRIVER OPTIONS	Non-Dim, Phase, Touch, DALI
IP RATING	IP67
CUTOUT	50mm

Notes:
 All data stipulated are nominal values based on 2700K with accuracy of +/- 5%.
 IP68 connector provided for cable join. Warranty will be voided if cable connection is not IP rated.

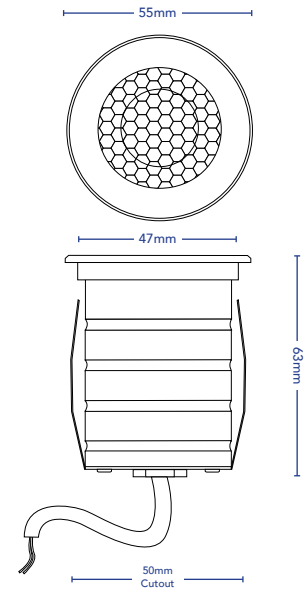

WHITE



BLACK



COPPER



BRASS



STAINLESS
STEEL



CUSTOM

BYRON

MANUFACTURING OPTIONS

FIXTURE					DRIVER
CODE	FINISH	CCT	BEAM ANGLE	VOLTAGE	DIMMING
4624	WH - White	27 - 2700K	20 - 20° Medium	24V - 24V DC	ND - Non-Dim
	BLK - Black	30 - 3000K			PH - Phase Dim
	CU - Copper		TH - Touch Dim		
	BR - Brass		DA - DALI		
	SS - Stainless Steel				
	CF - Custom Finish				

Example Code: **4624_CU_27_20_24V**

Notes:
Phase dimable drivers are not recommended for 24V DC fixtures due to possible flickering, but can be provided upon request.

ACCESSORIES



IP68 connector provided for cable join.
Warranty will be voided if cable connection is not IP rated.