


TOVO



BYRON

DESCRIPTION	Recessed In-ground Uplight
CODES	4624
FINISHES	White, Black, Copper, Brass, Stainless Steel, Aged Copper, Aged Brass, Custom
COLOUR TEMP	2700K, 3000K
BEAM ANGLE	20
CRI	≥90
LUMEN OUTPUT	254Lm
WATTAGE	4W
FIXTURE VOLTAGE	24V DC Constant Voltage
DIMMING	Based On Driver Selection
DRIVER	Remote Driver Required
DRIVER OPTIONS	Non-Dim, Phase, Touch, DALI
IP RATING	IP67
CUTOUT	50mm

Notes:
All data stipulated are nominal values based on 2700K with accuracy of +/- 5%.
IP68 connector provided for cable join. Warranty will be voided if cable connection is not IP rated.

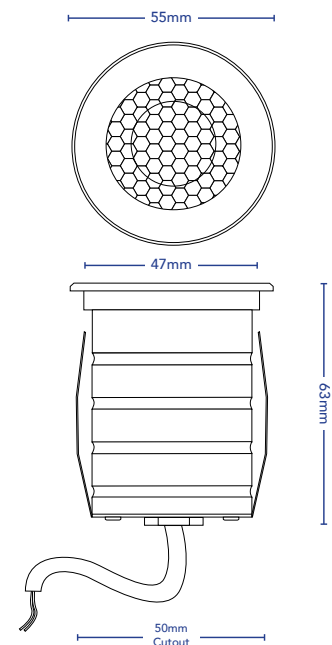

WHITE



BLACK



COPPER



AGED COPPER



BRASS



STAINLESS
STEEL



CUSTOM



AGED BRASS



INGRESS
IP67

MANUFACTURING OPTIONS

F I X T U R E					D R I V E R
CODE	FINISH	CCT	BEAM ANGLE	VOLTAGE	DIMMING
4624	WH - White	27 - 2700K	20 - 20° Medium	24V - 24V DC	ND - Non-Dim
	BLK - Black	30 - 3000K			PH - Phase Dim
	CU - Copper				TH - Touch Dim
	BR - Brass				DA - DALI
	SS - Stainless Steel				
	AC - Aged Copper				
	AB - Aged Brass				
	CF - Custom Finish				

Example Code: 4624_CU_27_20_24V

Notes:
Phase dimable drivers are not recommended for 24V DC fixtures due to possible flickering, but can be provided upon request.

ACCESSORIES



IP68 connector provided for cable join.
Warranty will be voided if cable connection is not IP rated.