
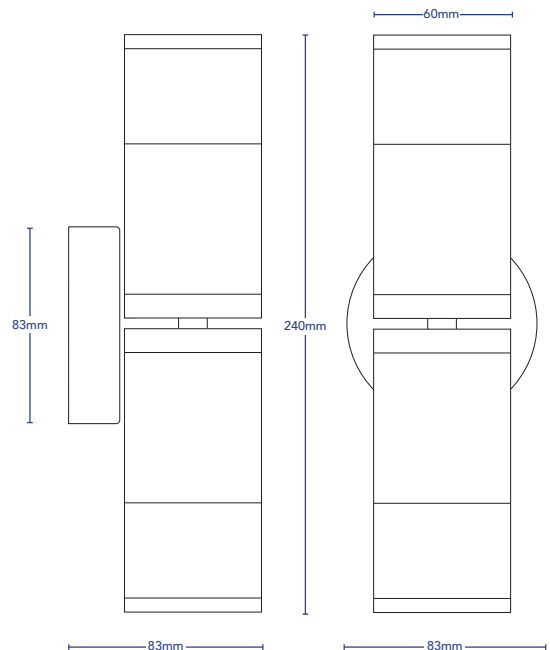


TOVO

C41 HORST

DESCRIPTION	Up/Down Wall Light
CODES	4830
FINISHES	White, Black, Copper, Brass, Stainless Steel, Aged Copper, Aged Brass, Custom
COLOUR TEMP	2700K, 3000K
BEAM ANGLE	60, *38, 24 36 (GU10)
CRI	≥90
LUMEN OUTPUT	1100Lm (550Lm per head 24V DC) 1300Lm (650Lm per head GU10)
WATTAGE	10W (5W per head 24V DC) 15W (7.5W per head GU10)
FIXTURE VOLTAGE	24V DC Constant Voltage 240V AC (GU10)
DIMMING	Based On Driver and Voltage Selection
DRIVER	Remote Driver Required for 24V DC Selection GU10 Lamp Provided for 240V AC Selection
DRIVER OPTIONS	Non-Dim, Phase, Touch, DALI
IP RATING	IP66

Notes:
*38 degree beam angle as standard.

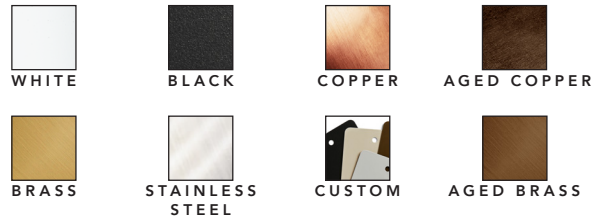

C41 HORST

MANUFACTURING OPTIONS

FIXTURE						DRIVER
CODE	FINISH	BACK PLATE	CCT	BEAM ANGLE	VOLTAGE	DIMMING
4830	WH - White	SB - Standard Base	27 - 2700K	24 - 24° Narrow	24V - 24V DC	ND - Non-Dim
	BLK - Black	FRN - Flat Round	30 - 3000K	38 - 38° Medium		PH - Phase Dim
	CU - Copper			60 - 60° Wide	TH - Touch Dim	
	BR - Brass				DA - DALI	
	SS - Stainless Steel					
	AC - Aged Copper					
	AB - Aged Brass					
CF - Custom Finish						
		BACK PLATE	CCT	BEAM ANGLE	VOLTAGE	DIMMING
		SB - Standard Base	27 - 2700K	36 - 36° Medium	240V - 240V AC (GU10)	ND - Non-Dim
		FRN - Flat Round	30 - 3000K			PH - Phase Dim
		FRE - Flat Rectangular				

Example Code: 4830_CU_FSQ_27_38_24V

Notes:
 *38 degree beam angle as standard.
 240V AC Fixture are only available with GU10 lamps.
 Phase dimable drivers are not recommended for 24V DC fixtures due to possible flickering, but can be provided upon request.

BACK PLATES

24V DC



SB - Standard Base



FRN - Flat Round

240V AC (GU10)



SB - Standard Base



FRN - Flat Round



FRE - Flat Rectangular

Notes:
 All screws provided for installation into different materials.