

TOVO



C41 RITTS

DESCRIPTION	Adjustable Garden Spike with glass diffuser
CODES	4850
FINISHES	White, Black, Copper, Brass, Stainless Steel, Aged Copper, Aged Brass, Custom
COLOUR TEMP	2700K, 3000K
BEAM ANGLES	60, *38, 24
CRI	≥90
LUMEN OUTPUT	550Lm
WATTAGE	5W
FIXTURE VOLTAGE	24V DC Constant Voltage
DIMMING	Based On Driver Selection
DRIVER	Remote Driver Required
DRIVER OPTIONS	Non-Dim, Phase, Touch, DALI
IP RATING	IP66

Notes:

*38 degree beam angle as standard.

All data stipulated are nominal values based on 2700K with accuracy of +/- 5%.

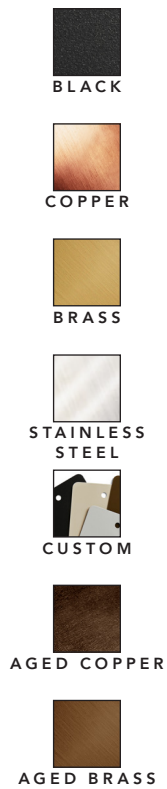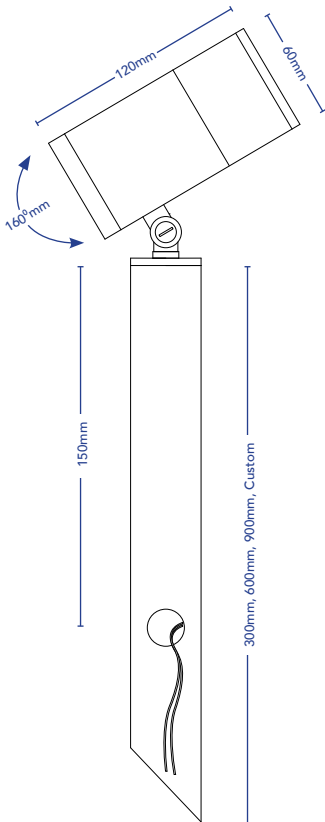

C41 RITTS

MANUFACTURING OPTIONS

FIXTURE						DRIVER
CODE	FINISH	SPIKE	CCT	BEAM ANGLE	VOLTAGE	DIMMING
4850	BLK - Black	S3 - 300mm	27 - 2700K	24 - 24° Narrow	24V - 24V DC	ND - Non-Dim
	CU - Copper	S6 - 600mm	30 - 3000K	38 - 38° Medium		PH - Phase Dim
	BR - Brass	S9 - 900mm		60 - 60° Wide		TH - Touch Dim
	SS - Stainless Steel	SC - Custom Length				DA - DALI
	AC - Aged Copper					
	AB - Aged Brass					
	CF - Custom Finish					

Example Code: **4850_CU_S6_27_38_24V**

Notes:
 *38 degree beam angle as standard.
 Phase dimable drivers are not recommended for 24V DC fixtures due to possible flickering, but can be provided upon request.

ACCESSORIES

