C41 PT

DESCRIPTION Fixed garden spike/Bollard with opal glass

diffuser and solid cap

CODES 1898

FINISHES Black, Copper, Brass, Stainless Steel, Custom COLOUR TEMP 2700K, 3000K


≥90

LUMEN OUTPUT 550Lm WATTAGE 5W

FIXTURE VOLTAGE 24V DC Constant Voltage DIMMING Based On Driver Selection DRIVER Remote Driver Required DRIVER OPTIONS Non-Dim, Phase, Touch, DALI

IP RATING

Notes: All data stipulated are nominal values based on 2700K with accuracy of +/- 5%.

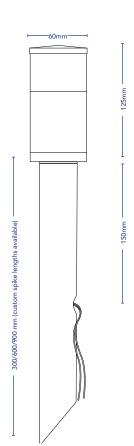











CUSTOM

MANUFACTURING OPTIONS

FIXTURE					DRIVER
CODE	FINISH	SPIKE	ССТ	VOLTAGE	DIMMING
1898	BLK - Black	S3 - 300m	27 - 2700K	24V - 24V DC	ND - Non-Dim
	CU - Copper	\$6 - 600mm	30 - 3000K		PH - Phase Dim
	BR - Brass	S9 - 900mm			TH - Touch Dim
	SS - Stainless Steel	SC - Custom length			DA - DALI
	CF - Custom Finish				

Example Code: 1898_CU_\$6_27_24V

Notes: Phase dimable drivers are not recommended for 24V DC fixtures due to possible flickering, but can be provided upon request.

ACCESSORIES

