



CLICK A 76




# CLICK A 76 - 10W

MODULATED DOWNLIGHT SYSTEM - ADJUSTABLE

DATASHEET

TOVO

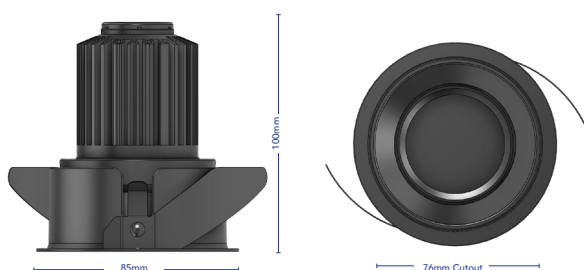

## OVERVIEW

|                 |                                                                                                                         |
|-----------------|-------------------------------------------------------------------------------------------------------------------------|
| CODE            | 4880                                                                                                                    |
| ACCESSORY       | Trimless Housing, Semi Trimless Housing<br>Honeycomb Louvre, Linear Spread Lens,<br>Frosted Lens                        |
| COLOUR TEMP     | 2700K, 3000K, 4000K, TW                                                                                                 |
| BEAM ANGLE      | 60°, 36°, 24°, 15°                                                                                                      |
| CRI             | ≥97                                                                                                                     |
| LUMEN OUTPUT    | 790Lm                                                                                                                   |
| WATTAGE         | 10W                                                                                                                     |
| FIXTURE CURRENT | 250mA                                                                                                                   |
| DRIVER          | Dedicated Driver Provided for<br>Constant Current Selection,<br>Remote Driver Required for 24V DC Selection             |
| DIMMING         | Phase, Touch, DALI                                                                                                      |
| IP RATING       | IP44                                                                                                                    |
| IC-RATING       | IC-4                                                                                                                    |
| CUT OUT         | 76mm                                                                                                                    |
| RECESS DEPTH    | 100mm - Fixture<br>100mm - Dedicated Phase Driver<br>120mm - Touch, DALI Drivers<br>80mm - Dedicated TW DALI DT8 Driver |
| *With housing   |                                                                                                                         |

Notes:  
All data stipulated are nominal values  
based on 2700K with accuracy of +/- 5%.



TILT 25°



ROTATION  
355°



IP44



# CLICK A 76 - 10W

MODULATED DOWNLIGHT SYSTEM - ADJUSTABLE

MANUFACTURING OPTIONS

TOVO

## FINISH



WH  
White



BLK  
Black

## ACCESSORY



OR  
Open Ring



LS  
Linear Lens



FL  
Frosted Lens



HL  
Honeycomb  
Louvre

## CCT



27  
2700K



30  
3000K



40  
4000K



27/65  
Tunable White

## BEAM ANGLE



15  
15° Lens



24  
24° Lens




36  
36° Lens




60  
60° Lens

## FRAME OPTIONS

ST  
Semi Trimless



TL  
Trimless\*\*\*



| FIXTURE |             |                |                         |                     |                 | DRIVER                                     |
|---------|-------------|----------------|-------------------------|---------------------|-----------------|--------------------------------------------|
| CODE    | FINISH      | FRAME          | ACCESSORY               | CCT                 | BEAM ANGLE      | DIMMING                                    |
| 4880    | WH - White  | ST - Semi Trim | OR - Open Ring*         | 27 - 2700K          | 15 - 15° Spot   | PH - Dedicated Phase Dim Driver Provided** |
|         | BLK - Black | TL - Trimless  | HL - Honeycomb Louvre   | 30 - 3000K          | 24 - 24° Narrow | DA - Dedicated DALI DT6 Driver Provided**  |
|         |             |                | LS - Linear Spread Lens | 40 - 4000K****      | 36 - 36° Medium | 24V - Remote 24V Driver Required           |
|         |             |                | FL - Frosted Lens       |                     | 60 - 60° Wide*  |                                            |
|         |             |                |                         | CCT                 | BEAM ANGLE      | DIMMING                                    |
|         |             |                |                         | 27/65 - 2700K/6500K | 15 - 15° Spot   | TW - Dedicated DALI DT8 Driver Provided**  |
|         |             |                |                         |                     | 24 - 24° Narrow | TW_24V - Remote 24V DC Driver Required,    |
|         |             |                |                         |                     | 36 - 36° Medium | 2 Channels                                 |
|         |             |                |                         |                     | 60 - 60° Wide*  |                                            |

Example Code: **1234\_WH\_ST\_OR\_27\_60\_PH**

Notes:

\*60 degree beam, Open Ring as standard.

\*\*All dedicated Constant Current drivers are set at 250mA.

\*\*\*Trimless frames are designed for plaster set ceilings only.


\*\*\*\*4000K available on request, minimum order quantities may apply.

# CLICK A 76 - 10W

MODULATED DOWNLIGHT SYSTEM - ADJUSTABLE

TYPICAL CONNECTION DIAGRAMS


TOVO

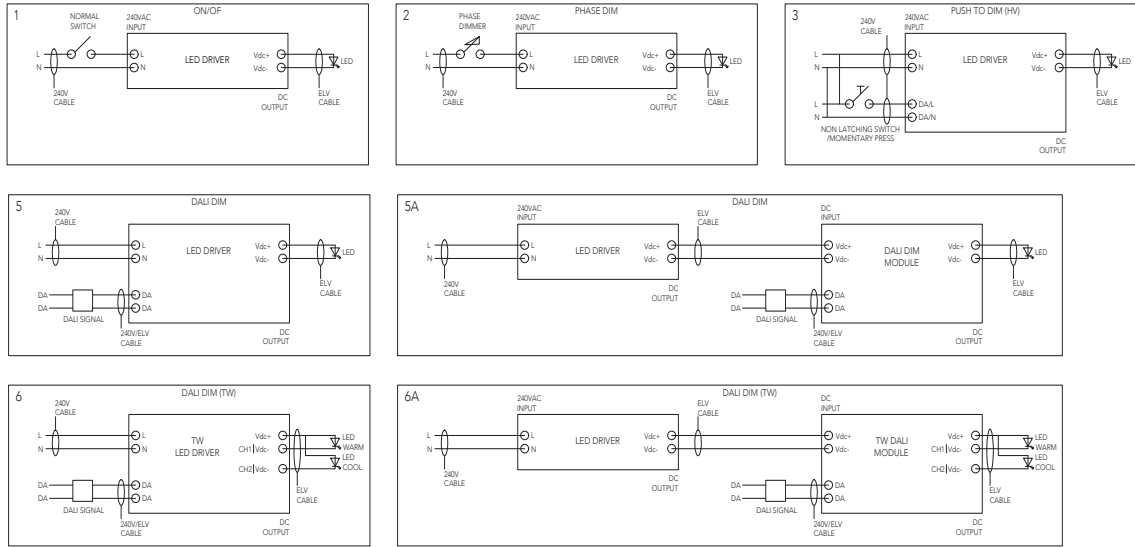

## Dedicated Driver

One driver per fixture  
Driver next to fixture


Typically DC Constant Current Fixtures



## Remote Driver

Multiple fixtures per driver  
Driver away from fixture

Typically 24V DC Constant Voltage Fixtures



## 240V Cables

Typical TPS cable to be used for AC wiring.  
Electrician to calculate wire guage based on connected load and cable length.

## ELV cables

Typical ELV cable with 24 strand count or higher to be used for DC wiring.  
Electrician to calculate wire guage based on connected load and cable length.

## Tunable White

For Tunable White CCT options with remotely located driver, 3 Core cable is required.



Online Cable Calculator  
<https://tovolighting.com.au/cable-calculator/>