


# TOVO



## CLICK SPOT D

DESCRIPTION	Modulated Downlight With Long Snoot
CODES	4683
FINISHES	White, Black
COLOUR TEMP	2700K, 3000K, 4000K, TW
BEAM ANGLE	*60°, 38°, 24°
CRI	≥92
LUMEN OUTPUT	786Lm
WATTAGE	10W
FIXTURE CURRENT	250mA
DIMMING	Based On Driver Selection
DRIVER	Dedicated Remote Driver Provided
DRIVER OPTIONS	Phase, Touch, DALI
IP RATING	IP44
CUT OUT	76mm
RECESS DEPTH	110mm
IC-Rating	IC-4

Notes:  
All data stipulated are nominal values based on 2700K with accuracy of +/- 5%.

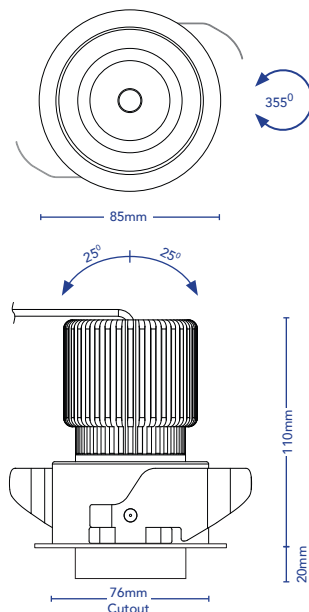

WHITE



BLACK



TILT  
25°



ROTATION  
355°



INGRESS  
IP44

# CLICK SPOT D

## MANUFACTURING OPTIONS

FIXTURE					DRIVER
CODE	FINISH	FRAME	CCT	BEAM ANGLE	DIMMING
4683	WH - White	ST - Semi Trim	27 - 2700K	24 - 24° Narrow	PH - Phase Dim
	BLK - Black	TL - Trimless	30 - 3000K	38 - 38° Medium	DA - DALI
			40 - 4000K	60 - 60° Wide*	*Dedicated driver provided @ 250mA
			CCT	BEAM ANGLE	DIMMING
			22/40 - 2200K-4000K	24 - 24° Narrow	TW - DALI
			27/65 - 2700K-6500K	38 - 38° Medium	*Dedicated remote TW driver provided. @ 250mA. 4 Core cable required. 190mm ceiling recess required
				60 - 60° Wide	

Example Code: 4683\_WH\_ST\_27\_60\_PH

Notes:  
\*60 degree beam angle as standard.  
For Tunable White CCT options the only driver option available is DALI DT8.  
Black finished items have limited stock quantities and longer lead times may apply depending on order quantity.

## MOUNTING FRAMES



Notes:  
Trimless frames are intended for plaster set ceilings only.