

TOVO

FAIRLIGHT



| | |
|-----------------|---|
| DESCRIPTION | Eyelid Pathlight |
| CODES | 2750 |
| FINISHES | White, Black, Copper, Brass, Stainless Steel, Aged Copper, Aged Brass, Custom |
| COLOUR TEMP | 2700K, 3000K |
| CRI | ≥90 |
| LUMEN OUTPUT | 550Lm (24V DC) 650Lm (GU10) |
| WATTAGE | 5W (24V DC) 7.5W (GU10) |
| FIXTURE VOLTAGE | 24V DC Constant Voltage 240V AC (GU10) |
| DIMMING | Based On Driver and Voltage Selection |
| DRIVER | Remote Driver Required for 24V DC Selection GU10 Lamp Provided for 240V AC Selection |
| DRIVER OPTIONS | Non-Dim, Phase, Touch, DALI |
| IP RATING | IP66 |

Notes:
All data stipulated are nominal values based on 2700K with accuracy of +/- 5%.
IP68 connector provided for cable join. Warranty will be voided if cable connection is not IP rated.



WHITE



BLACK



COPPER



AGED
COPPER



STAINLESS
STEEL



CUSTOM




BRASS



AGED
BRASS



INGRESS
IP66

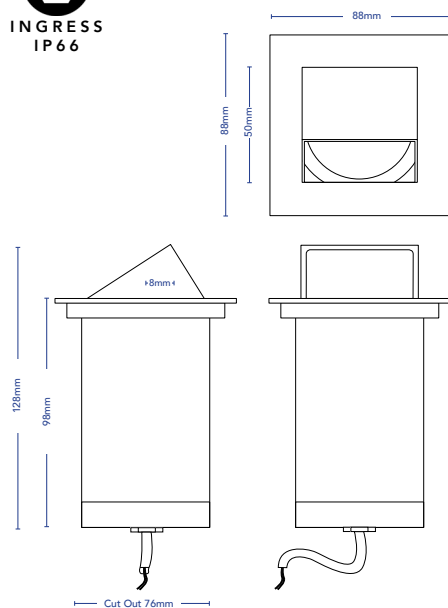

FAIRLIGHT

MANUFACTURING OPTIONS

| F I X T U R E | | | | D R I V E R |
|---------------|----------------------|------------|-----------------------|----------------|
| CODE | FINISH | CCT | VOLTAGE | DIMMING |
| 2750 | WH -White | 27 - 2700K | 24V - 24V DC | ND - Non-Dim |
| | BLK - Black | 30 - 3000K | 240V - 240V AC (GU10) | PH - Phase Dim |
| | CU - Copper | | | TH - Touch Dim |
| | BR - Brass | | | DA - DALI |
| | SS - Stainless Steel | | | |
| | AC - Aged Copper | | | |
| | AB - Aged Brass | | | |
| | CF - Custom Finish | | | |

Example Code: 2750_CU_27_24V

Notes:
Phase dimable drivers are not recommended for 24V DC fixtures due to possible flickering, but can be provided upon request.