

TOVO



NEWPORT TWIN

| | |
|-----------------|---|
| DESCRIPTION | Twin Head Adjustable Garden Spike |
| CODES | 3790 |
| FINISHES | Black, Copper, Brass, Stainless Steel, Custom |
| COLOUR TEMP | 2700K, 3000K |
| BEAM ANGLES | 60, 38, 24 |
| CRI | ≥80 |
| LUMEN OUTPUT | 1352Lm (676Lm per head) |
| WATTAGE | 16W (8W per head) |
| FIXTURE VOLTAGE | 24V DC Constant Voltage |
| DIMMING | Based On Driver Selection |
| DRIVER | Remote Driver Required |
| DRIVER OPTIONS | Non-Dim, Phase, Touch, DALI |
| IP RATING | IP66 |

Notes:
All data stipulated are nominal values based on 2700K with accuracy of +/- 5%.



WHITE



BLACK



COPPER



BRASS



STAINLESS
STEEL



CUSTOM




INGRESS
IP66



ROTATION
360°



TILT
160°

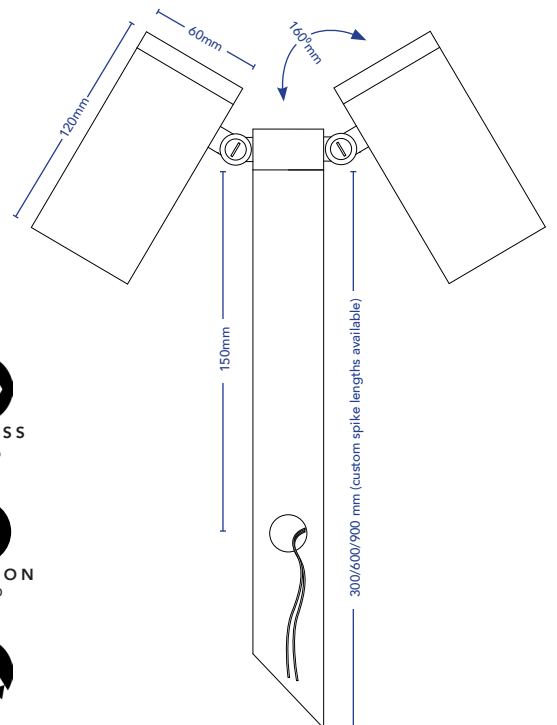

NEWPORT TWIN

MANUFACTURING OPTIONS

| FIXTURE | | | | | | DRIVER |
|---------|----------------------|--------------------|------------|-----------------|--------------|----------------|
| CODE | FINISH | SPIKE | CCT | BEAM ANGLE | VOLTAGE | DIMMING |
| 3790 | BLK - Black | S3 - 300m | 27 - 2700K | 24 - 24° Narrow | 24V - 24V DC | ND - Non-Dim |
| | CU - Copper | S6 - 600mm | 30 - 3000K | 38 - 38° Medium | | PH - Phase Dim |
| | BR - Brass | S9 - 900mm | | 60 - 60° Wide | | TH - Touch Dim |
| | SS - Stainless Steel | SC - Custom length | | | | DA - DALI |
| | CF - Custom Finish | | | | | |

Example Code: **3790_CU_S6_27_38_24V**

Notes:
Phase dimable drivers are not recommended for 24V DC fixtures due to possible flickering, but can be provided upon request.

ACCESSORIES

