
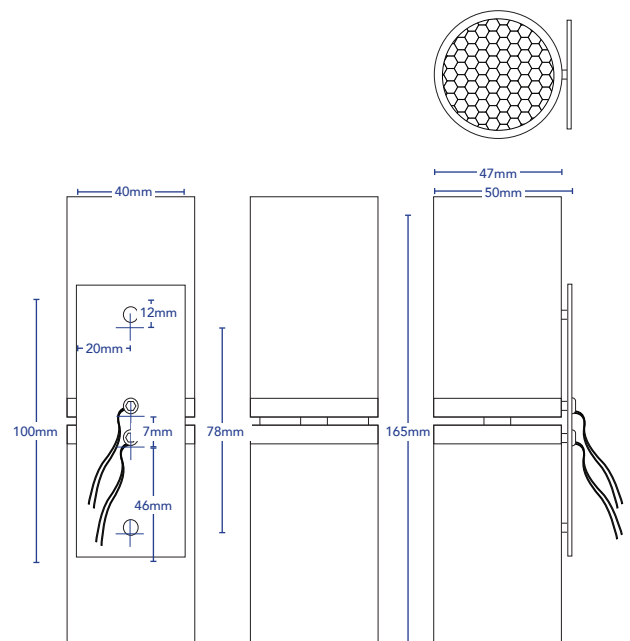


# TOVO

## ORPHEUS

DESCRIPTION	Mini Up/Down Wall Light
CODES	1991
FINISHES	White, Black, Copper, Brass, Stainless Steel, Aged Copper, Aged Brass, Custom
COLOUR TEMP	2700K, 3000K
BEAM ANGLE	38
CRI	≥90
LUMEN OUTPUT	840Lm (420Lm per head)
WATTAGE	8W (4W per head)
FIXTURE VOLTAGE	24V DC Constant Voltage
DIMMING	Based On Driver and Voltage Selection
DRIVER	Remote Driver Required for 24V DC Selection
DRIVER OPTIONS	Non-Dim, Phase, Touch, DALI
IP RATING	IP66

Notes:  
All data stipulated are nominal values based on 2700K with accuracy of +/- 5%.

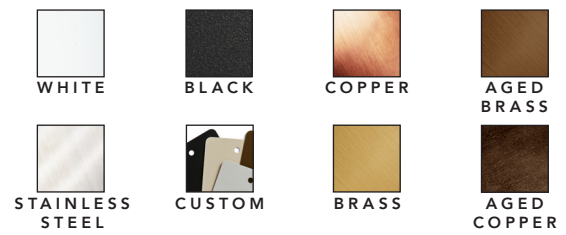

# ORPHEUS

## MANUFACTURING OPTIONS

FIXTURE						DRIVER
CODE	FINISH	BACK PLATE	CCT	BEAM ANGLE	VOLTAGE	DIMMING
1991	WH - White	SB - Standard Base	27 - 2700K	38 - 38° Medium	24V - 24V DC	ND - Non-Dim
	BLK - Black	FRN - Flat Round	30 - 3000K			PH - Phase Dim
	CU - Copper	FRE - Flat Rectangular		TH - Touch Dim		
	BR - Brass			DA - DALI		
	SS - Stainless Steel					
	AC - Aged Copper					
	AB - Aged Brass					
CF - Custom Finish						

Example Code: **1991\_CU\_FRN\_27\_38\_24V**

Notes:  
\* 240V AC Fixture are only available with Integral Back Plates. A non-dimmable AC to DC driver is provided inside the Back Plate.  
Phase dimable drivers are not recommended for 24V DC fixtures due to possible flickering, but can be provided upon request.

## BACK PLATES

24V DC



SB - Standard Base



FRN - Flat Round



FRE - Flat Rectangular

Notes:  
All screws provided for installation into different materials.