



# TOVO



## SHELLEY

DESCRIPTION	Recessed Inground Uplight or Wall Mounted Pathlight
CODES	4676
FINISHES	White, Black, Copper, Brass, Stainless Steel, Custom
COLOUR TEMP	2700K, 3000K
BEAM ANGLE	*20, 38, 60
CRI	≥90
LUMEN OUTPUT	254Lm
WATTAGE	4W
FIXTURE VOLTAGE	24V DC Constant Voltage
DIMMING	Based On Driver and Voltage Selection
DRIVER	Remote Driver Required for 24V DC Selection
DRIVER OPTIONS	Non-Dim, Phase, Touch, DALI
IP RATING	IP66

Notes:  
\*20 degree beam angle as a standard  
All data stipulated are nominal values based on 2700K with accuracy of +/- 5%.

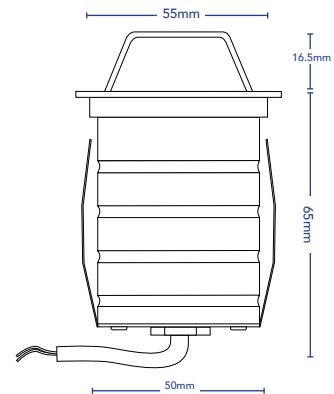

WHITE



BLACK



COPPER



BRASS



STAINLESS  
STEEL



CUSTOM



INGRESS  
IP66

# SHELLEY

---

## MANUFACTURING OPTIONS

---

FIXTURE					DRIVER
CODE	FINISH	CCT	BEAM ANGLE	VOLTAGE	DIMMING
4676	WH - White	27 - 2700K	20 - 20° Narrow	24V - 24V DC	ND - Non-Dim
	BLK - Black	30 - 3000K	38 - 38° Medium		PH - Phase Dim
	CU - Copper		60 - 60° Wide		TH - Touch Dim
	BR - Brass				DA - DALI
	SS - Stainless Steel				
CF - Custom Finish					

Example Code: 4676\_CU\_27\_38\_24V

---