


# TOVO



## SKYLINE HORIZON

DESCRIPTION	Custom extrusion with curved indirect lighting reflection and integrated ventilation.
CODES	4177
FINISHES	White, Custom
COLOUR TEMP	2700K, 3000K, TW, RGBW
CRI	≥90
WATTAGE/LUMENS	CCT - 12W - 840Lm/m CCT - 24W - 1680Lm/m TW - 28W - 1958Lm/m RGBW - 32W - 1680Lm/m
FIXTURE VOLTAGE	24V DC Constant Voltage
DIMMING	Based On Driver Selection
DRIVER	Remote Driver Required
DRIVER OPTIONS	Non-Dim, Phase, Touch, DALI
IP RATING	IP54

Notes:  
All data stipulated are nominal values based on 2700K with accuracy of +/- 5%.  
Maximum lenght on one power feed is 5000mm

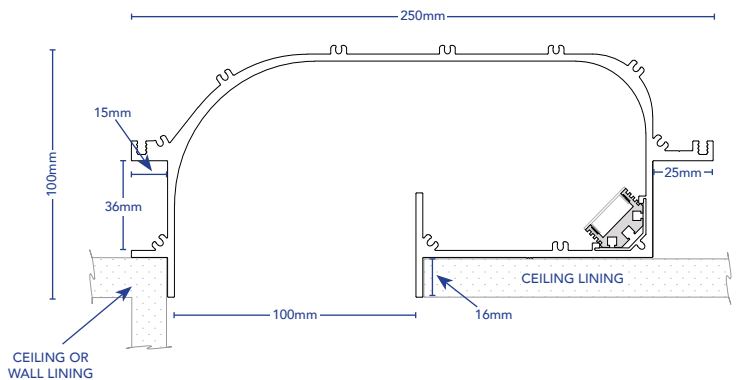

WHITE



CUSTOM FINISH



IP RATING: 54

# SKYLINE HORIZON

## MANUFACTURING OPTIONS

FIXTURE				DRIVER	
CODE	FINISH	WATTAGE	CCT	DIMMING	
4177	WH - White	12W - 12W per meter	27 - 2700K	ND - Non-Dim	
	CF - Custom Finish	24W - 24W per meter	30 - 3000K	PH - Phase Dim	
				TH - Touch Dim	
				DA - DALI	
		WATTAGE	CCT	DIMMING	
		TW - 28.8W per meter	22/40 - 2200K-4000K	DA - DALI	
			27/65 - 2700K-6500K	* Remote TW driver required. 3 Core cable required.	
		WATTAGE	CCT	DIMMING	
		RGBW - 32W per meter	RGB/27 - RGB - 2700K	DA - DALI	
			RGB/60 - RGB - 6000K	* Remote RGBW driver required. 5 Core cable required.	

Example Code: 4177\_WH\_24W\_27

Notes:  
24W per meter provided as standard.  
Phase dimable drivers are not recommended for 24V DC fixtures due to possible flickering, but can be provided upon request.  
For Tuneable White and RGBW options, only DALI drivers are available.



Online cut sheet  
<https://tovolighting.com.au/skyline-horizon-cut-sheet-form/>