


TOVO



CLICK SPOT F

DESCRIPTION	Modulated Downlight System With Low Profile Design
CODES	4929
FINISHES	White, Black
COLOUR TEMP	2700K, 3000K, 4000K, TW
BEAM ANGLE	*120°
CRI	≥92
LUMEN OUTPUT	786Lm
WATTAGE	10W
FIXTURE CURRENT	250mA
DIMMING	Based On Driver Selection
DRIVER	Dedicated Remote Driver Provided
DRIVER OPTIONS	Phase, Touch, DALI
IP RATING	IP44
CUT OUT	76mm
RECESS DEPTH	40mm
IC-Rating	IC-4

Notes:
All data stipulated are nominal values based on 2700K with accuracy of +/- 5%.

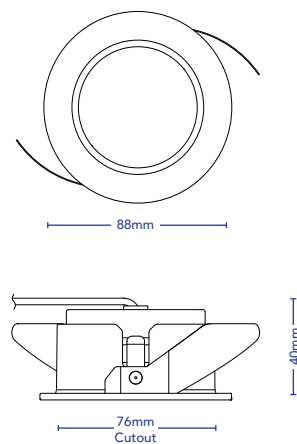

WHITE



BLACK



INGRESS
IP44

CLICK SPOT F

MANUFACTURING OPTIONS

F I X T U R E				D R I V E R
CODE	FINISH	CCT	BEAM ANGLE	DIMMING
4929	WH - White	27 - 2700K	120 - 120° Wide*	PH - Phase Dim
	BLK - Black	30 - 3000K		DA - DALI
		40 - 4000K		*Dedicated driver provided @ 250mA
		CCT	BEAM ANGLE	DIMMING
		22/40 - 2200K-4000K	120 - 120° Wide*	TW - DALI
		27/65 - 2700K-6500K		*Dedicated remote TW driver provided. @ 250mA. 4 Core cable required. 190mm ceiling recess required

Example Code: 4929_WH_27_120_PH

Notes:
*120 degree beam angle as standard.
For Tunable White CCT options the only driver option available is DALI DT8.
Black finished items have limited stock quantities and longer lead times may apply depending on order quantity.