


TOVO

MANDURAH

DESCRIPTION	Fixed garden spike up light
CODES	4900
FINISHES	Black, Copper, Brass, Stainless Steel, Aged Copper, Aged Brass, Custom
COLOUR TEMP	2700K, 3000K
BEAM ANGLES	60, *38, 24
CRI	≥80
LUMEN OUTPUT	550Lm
WATTAGE	5W
FIXTURE VOLTAGE	24V DC Constant Voltage
DIMMING	Based On Driver Selection
DRIVER	Remote Driver Required
DRIVER OPTIONS	Non-Dim, Phase, Touch, DALI
IP RATING	IP66

Notes:
*38 degree beam angle as standard.
All data stipulated are nominal values based on 2700K with accuracy of +/- 5%.

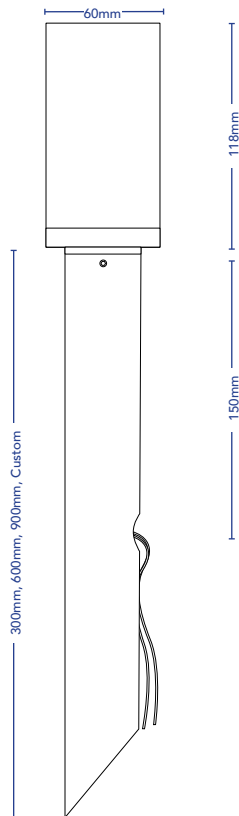

BLACK



COPPER



BRASS



STAINLESS
STEEL



AGED COPPER



AGED BRASS



CUSTOM



MANDURAH


MANUFACTURING OPTIONS

FIXTURE						DRIVER
CODE	FINISH	SPIKE	CCT	BEAM ANGLE	VOLTAGE	DIMMING
4900	BLK - Black	S3 - 300m	27 - 2700K	24 - 24° Narrow	24V - 24V DC	ND - Non-Dim
	CU - Copper	S6 - 600mm	30 - 3000K	38 - 38° Medium		PH - Phase Dim
	BR - Brass	S9 - 900mm		60 - 60° Wide		TH - Touch Dim
	SS - Stainless Steel	SC - Custom Length				DA - DALI
	AC - Aged Copper					
	AB - Aged Brass					
	CF - Custom Finish					


Example Code: **4900_CU_S6_27_38_24V**

Notes:
 *38 degree beam angle as standard.
 Phase dimable drivers are not recommended for 24V DC fixtures due to possible flickering, but can be provided upon request.


ACCESSORIES




S3 - 300mm



S6 - 600mm



S9 - 900mm



SC - Custom Length