


TOVO



MINI SPOT - HIGH OUTPUT

DESCRIPTION	Miniature fixed Downlight With High Output
CODES	5032
FINISHES	White, Black, Copper, Brass, Stainless steel, Aged Copper, Aged Brass, Custom
COLOUR TEMP	2700K, 3000K
BEAM ANGLE	*45°, 25°
CRI	≥92
LUMEN OUTPUT	420Lm
WATTAGE	6W
FIXTURE VOLTAGE	24V DC Constant Voltage 25-42V DC Constant Current
DIMMING	Based On Driver and Voltage Selection
DRIVER	Remote Driver Required for 24V DC Selection Remote Driver Provided for Constant Current Selection
DRIVER OPTIONS	Non-Dim, Phase, Touch, DALI
IP RATING	IP54
CUT OUT	40mm
RECESS DEPTH	73mm

Notes:
All data stipulated are nominal values based on 2700K with accuracy of +/- 5%.

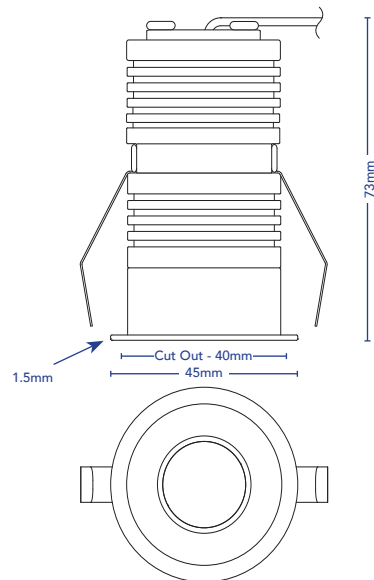

WHITE



BLACK



COPPER



BRASS



STAINLESS STEEL



CUSTOM



AGED COPPER



AGED BRASS



INGRESS
IP54

MINI SPOT - HIGH OUTPUT

MANUFACTURING OPTIONS

FIXTURE					DRIVER
CODE	FINISH	CCT	BEAM ANGLE	VOLTAGE	DIMMING
5032	WH - White	27 - 2700K	25 - 25° Narrow	24V - 24V DC	ND - Non-Dim
	BLK - Black	30 - 3000K	45 - 45° Wide	*Remote driver required	PH - Phase Dim
	CU - Copper				TH - Touch Dim
	BR - Brass				DA - DALI
	SS - Stainless Steel				
	AC - Aged Copper				
	AB - Aged Brass	CCT	BEAM ANGLE	VOLTAGE	DIMMING
	CF - Custom Finish	27 - 2700K	25 - 25° Narrow	CC - 20V-40V DC	PH - Phase Dim
		30 - 3000K	45 - 45° Wide	*Dedicated remote driver provided @ 500mA	TH - Touch Dim
					DA - DALI

Example Code: 5032_WH_27_45_CC_PH

Notes:
*45 degree beam angle as standard.
For Constant Current selections, provided driver fits through cutout, but standard plug top does not, direct 240V AC connection is required to driver
Phase dimable drivers are not recommended for 24V DC fixtures due to possible flickering, but can be provided upon request.