

# TOVO




## CLICK SPOT W

DESCRIPTION	Modulated Downlight System With Asymmetric Lens
CODES	5034
FINISHES	White, Black
COLOUR TEMP	2700K, 3000K, 4000K, TW
BEAM ANGLE	*60°, 38°, 24°
CRI	≥92
LUMEN OUTPUT	786Lm
WATTAGE	10W
FIXTURE CURRENT	250mA
DIMMING	Based On Driver Selection
DRIVER	Dedicated Remote Driver Provided
DRIVER OPTIONS	Phase, Touch, DALI
IP RATING	IP44
CUT OUT	76mm
RECESS DEPTH	65mm
IC-Rating	IC-4

Notes:

All data stipulated are nominal values based on 2700K with accuracy of +/- 5%.

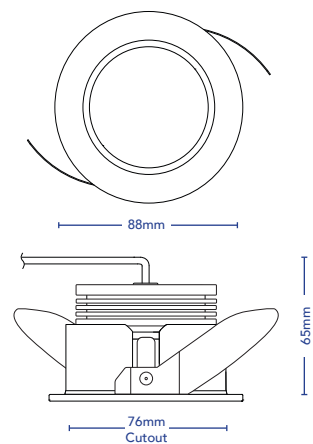

WHITE



BLACK



INGRESS  
IP44

# CLICK SPOT W

## MANUFACTURING OPTIONS

F I X T U R E			D R I V E R
CODE	FINISH	CCT	DIMMING
5034	WH - White	27 - 2700K	PH - Phase Dim
	BLK - Black	30 - 3000K	DA - DALI
		40 - 4000K	*Dedicated driver provided @ 250mA
CCT			DIMMING
22/40 - 2200K-4000K			TW - DALI
27/65 - 2700K-6500K			*Dedicated remote TW driver provided. @ 250mA, 4 Core cable required. 190mm ceiling recess required

Example Code: 4034\_WH\_27\_PH

Notes:  
\*60 degree beam angle as standard.  
For Tunable White CCT options the only driver option available is DALI DT8.  
Black finished items have limited stock quantities and longer lead times may apply depending on order quantity.