

TOVO
JINDY

JINDY - 5W

FIXED DOWNLIGHT WITH SOFT EDGE REFLECTOR



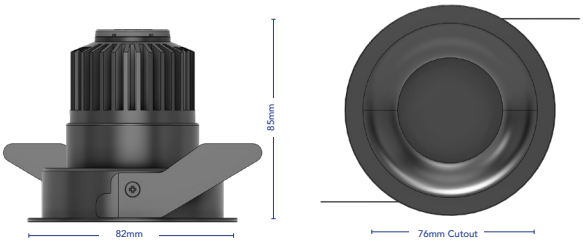

OVERVIEW

CODE	4889
ACCESSORY	Honeycomb Louvre, Linear Spread Lens, Frosted Lens , IP65 Glass
COLOUR TEMP	2700K, 3000K, 4000K, TW
BEAM ANGLE	60°, 36°, 24°, 15°
CRI	≥97
LUMEN OUTPUT	380Lm
WATTAGE	5W
FIXTURE CURRENT	150mA
DRIVER	Dedicated Driver Provided for Constant Current Selection, Remote Driver Required for 24V DC Selection
DIMMING	Phase, Touch, DALI
IP RATING	IP44/IP65
IC-RATING	IC-4
CUT OUT	76mm
RECESS DEPTH	85mm - Fixture 65mm - Dedicated Phase Driver 85mm - Touch, DALI Drivers 50mm - Dedicated TW DALI DT8 Driver

Notes:
All data stipulated are nominal values
based on 2700K with accuracy of +/- 5%.

IP44/65





TOVO Lighting
726 Pittwater Road, Brookvale, NSW 2100 Australia

E: office@tovolighting.com.au
Ph: +61 2 9939 1122

JINDY - 5W

FIXED DOWNLIGHT WITH SOFT EDGE REFLECTOR

FINISH



WH
White



BLK
Black

ACCESSORY



OR
Open Ring



LS
Linear Lens



FL
Frosted Lens



HL
Honeycomb Louvre



IP
IP Glass

CCT



27
2700K



30
3000K



40
4000K



27/65
Tunable White

BEAM ANGLE



15
15° Lens



24
24° Lens



36
36° Lens



60
60° Lens

FIXTURE						DRIVER	
CODE	FINISH	ACCESSORY		CCT		BEAM ANGLE	DIMMING
4889	**WH** - White	**OR** - Open Ring*		**27**	- 2700K	**15** - 15° Spot	**PH** - Dedicated Phase Dim Driver Provided**
	BLK - Black	**HL** - Honeycomb Louver		**30**	- 3000K	**24** - 24° Narrow	**DA** - Dedicated DALI DT6 Driver Provided**
		LS - Linear Spread Lens		**40**	- 4000K***	**36** - 36° Medium	**24V** - Remote 24V Driver Required
		FL - Frosted Lens				**60** - 60° Wide*	
		IP - IP65 Glass					


CCT	BEAM ANGLE	DIMMING
27/65 - 2700K/6500K	**15** - 15° Spot	**TW** - Dedicated DALI DT8 Driver Provided**
	24 - 24° Narrow	**TW_24V** - Remote 24V DC Driver Required,
	36 - 36° Medium	2 Channels
	60 - 60° Wide*	

Example Code: **1234_WH_OR_27_60_PH**


Notes:
*60 degree beam, Open Ring as standard.
**All dedicated Constant Current drivers are set at 150mA.
***4000K available on request, minimum order quantites may apply.

JINDY - 5W

FIXED DOWNLIGHT WITH SOFT EDGE REFLECTOR

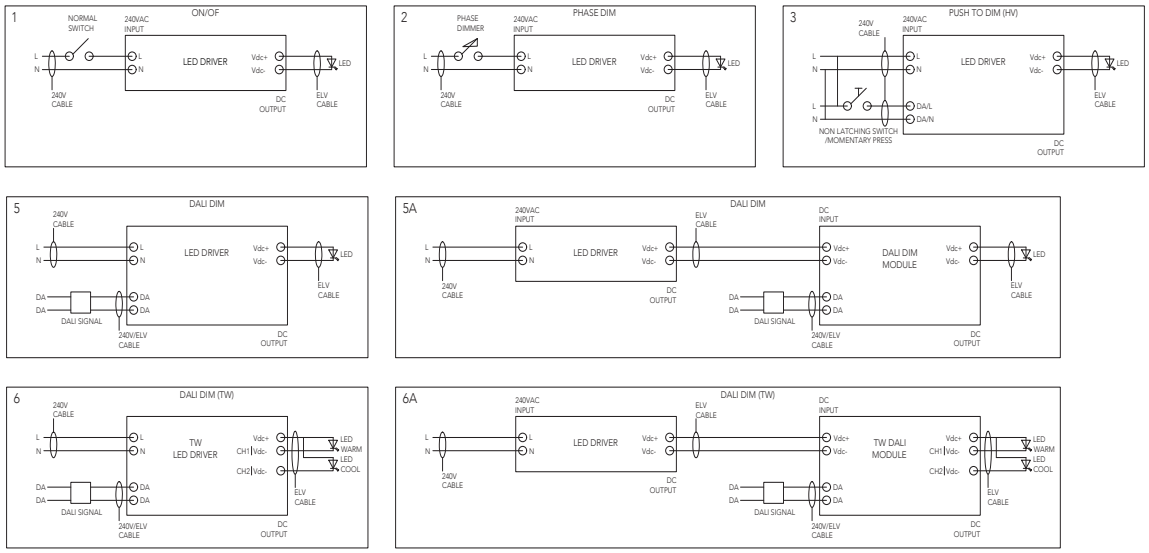


Dedicated Driver
One driver per fixture
Driver next to fixture



Typically DC Constant Current Fixtures

Remote Driver
Multiple fixtures per driver
Driver away from fixture



Typically 24V DC Constant Voltage Fixtures

240V Cables
Typical TPS cable to be used for AC wiring.
Electrician to calculate wire guage based on connected load and cable length.

ELV cables
Typical ELV cable with 24 strand count or higher to be used for DC wiring.
Electrician to calculate wire guage based on connected load and cable length.

Tunable White
For Tunable White CCT options with remotely located driver, 3 Core cable is required.

Online Cable Calculator
https://tovolighting.com.au/cable-calculator/