


TOVO



BARRIER REEF

DESCRIPTION	Exterior Rated Up and Down Light
CODES	2538
FINISHES	White, Black, Copper, Brass, Stainless Steel, Aged Copper, Aged Brass, Custom
COLOUR TEMP	2700K, 3000K
BEAM ANGLE	60, 38, 24 36 (GU10)
CRI	≥90
LUMEN OUTPUT	1352Lm (676Lm per head 24V DC) 1300Lm (650Lm per head GU10)
WATTAGE	16W (8W per head 24V DC) 15W (7.5W per head GU10)
FIXTURE VOLTAGE	24V DC Constant Voltage 240V AC
DIMMING	Based On Driver and Voltage Selection
DRIVER	Remote Driver Required for 24V DC Selection GU10 Lamp Provided for 240V AC Selection
DRIVER OPTIONS	Non-Dim, Phase, Touch, DALI
IP RATING	IP66

Notes:
*38 degree beam angle as standard.
All data stipulated are nominal values based on 2700K with accuracy of +/- 5%.

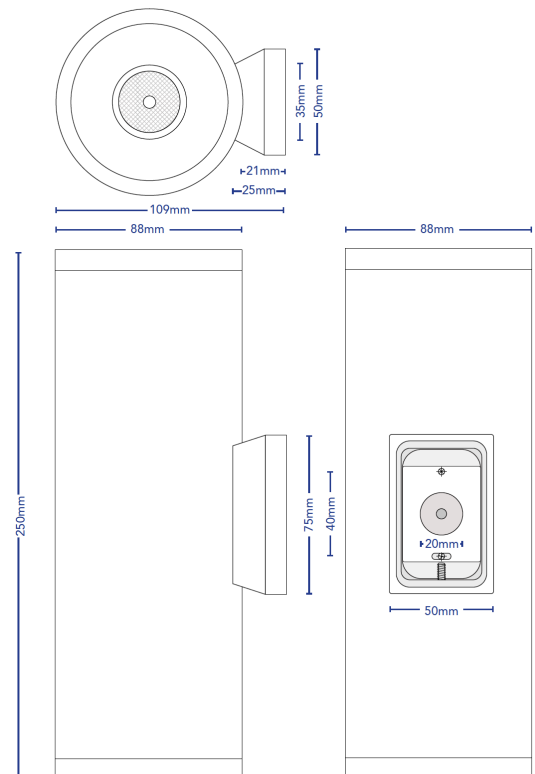

WHITE



BLACK



COPPER



AGED
COPPER



BRASS



STAINLESS
STEEL



CUSTOM



AGED
BRASS



BARRIER REEF

MANUFACTURING OPTIONS

FIXTURE					DRIVER
CODE	FINISH	CCT	BEAM ANGLE	VOLTAGE	DIMMING
2538	WH - White	27 - 2700K	24 - 24° Narrow	24V - 24V DC	ND - Non-Dim
	BLK - Black	30 - 3000K	38 - 38° Medium		PH - Phase Dim
	CU - Copper		60 - 60° Wide	TH - Touch Dim	
	BR - Brass			DA - DALI	
	SS - Stainless Steel				
	AC - Aged Copper				
	AB - Aged Brass				
CF - Custom Finish					
		CCT	BEAM ANGLE	VOLTAGE	DIMMING
		27 - 2700K	36 - 36° Medium	240V - 240V AC (GU10)	ND - Non-Dim
		30 - 3000K			PH - Phase Dim

Example Code: **2538_CU_27_38_24V**

Notes:
*38 degree beam angle as standard.
240V AC Fixture are only available with GU10 lamps.
Phase dimable drivers are not recommended for 24V DC fixtures due to possible flickering, but can be provided upon request.
