

TOVO



PENINSULA PENDANT

DESCRIPTION	Minimal 42mm Round Linear LED Pendant.
CODES	4734
FINISHES	White, Black, Copper, Brass, Custom
COLOUR TEMP	2700K, 3000K, TW
BEAM ANGLE	Diffused
CRI	≥90
LUMEN OUTPUT	2805Lm/m
WATTAGE	28.8W/m
FIXTURE VOLTAGE	24V DC Constant Voltage
DIMMING	Based On Driver Selection
DRIVER	Remote Driver Required
DRIVER OPTIONS	Non-Dim, Phase, Touch, DALI
IP RATING	IP20



WHITE



BLACK



BRASS



COPPER



CUSTOM




INGRESS
IP20

Notes:
All data stipulated are nominal values based on 2700K with accuracy of +/- 5%.
The outputs stipulated would be additive for each segment on up and down pendant selections.



Online cut sheet
<https://tovolighting.com.au/peninsula-pendant-cut-sheet-form/>

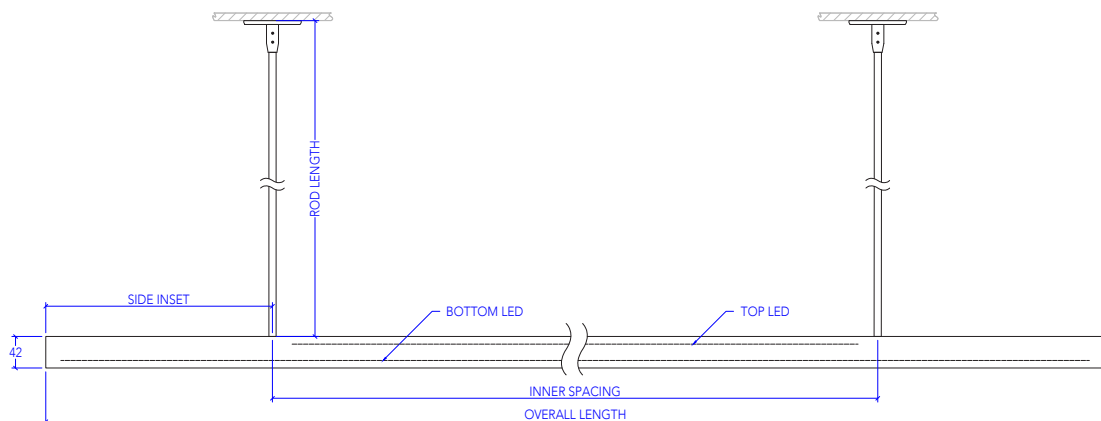

PENINSULA PENDANT

MANUFACTURING OPTIONS

FIXTURE				DRIVER
CODE	FINISH	CCT	LIGHT DIRECTION	DIMMING
4734	WH - White	27 - 2700K	D - Down Only	ND - Non-Dim
	BLK - Black	30 - 3000K	U&D - Up & Down	PH - Phase Dim
	CU - Copper	22/40 - 2200K/4000K		TH - Touch Dim
	BR - Brass	27/65 - 2700K/6500K		DA - DALI
	CF - Custom Finish			

Example Code: 4734_BR_27_U&D

Notes:
 Phase dimmable drivers are not recommended for 24V DC fixtures due to possible flickering, but can be provided upon request.
 For Up & Down fixture selections two separate sets of DC wires are provided for each light direction.
 For Tuneable White CCT options, only DALI drivers are available

TECHNICAL DRAWING

