

## DRIFT 48

DESCRIPTION 48V Low Voltage LED Track Light

CODES 7052 FINISHES White, Black

COLOUR TEMP 2700K, 3000K, Tunable White

BEAM ANGLE \*60°, 38°, 24°, 15°

CRI ≥97 LUMEN OUTPUT 1000Lm WATTAGE 10W

FIXTURE VOLTAGE 48V DC Constant Voltage DIMMING Non-Dim, 0-10V, DALI


IP RATING IP20

Notes:

All data stipulated are nominal values based on 2700K with accuracy of +/- 5%. Fixture requires 48V track with suitable power supply.





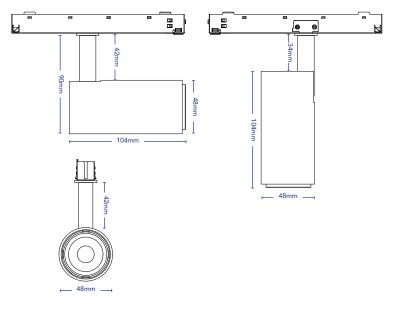

 $\label{thm:concealed} \textit{Track} \ \textit{adapter} \ \textit{dimensions} \ \textit{vary} \ \textit{based} \ \textit{on} \ \textit{dimming} \ \textit{type} \ \textit{selected} \ \textit{and} \ \textit{is} \ \textit{fully} \ \textit{concealed} \ \textit{within} \ \textit{track}.$ 







## DRIFT 48

## MANUFACTURING OPTIONS

FIXTURE					DRIVER
CODE	FINISH	WATTAGE	ССТ	BEAM ANGLE	DIMMING
7052	WH - White	<b>10W</b> - 10 Watt	<b>27</b> - 2700K	<b>15</b> - 15° Spot	ND - Non-Dim
	BLK - Black		<b>30</b> - 3000K	<b>24</b> - 24° Narrow	1V - 0-10V
			<b>27/65</b> - 2700K-6500K	<b>38</b> - 38° Medium	DA - DALI
				<b>60</b> - 60° Wide	

Example Code: **7052\_10W\_BLK\_27\_38\_DA** 

60 degree beam angle as standard.
Full track system with suitable 48V DC power supply required.