

## DRIFT 62

DESCRIPTION 48V Low Voltage LED Track Light

CODES 7054 FINISHES

White, Black

COLOUR TEMP 2700K, 3000K, Tunable White

BEAM ANGLE \*60°, 38°, 24°, 15°

CRI ≥97 LUMEN OUTPUT 1500Lm WATTAGE 15W

FIXTURE VOLTAGE 48V DC Constant Voltage

DIMMING Non-Dim, 0-10V, DALI


IP RATING IP20

Notes:

All data stipulated are nominal values based on 2700K with accuracy of +/- 5%. Fixture requires 48V track with suitable power supply.





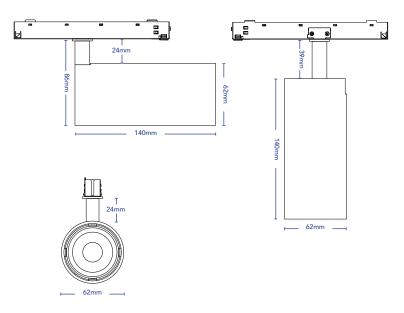

 $\label{thm:concealed} \textit{Track adapter dimensions vary based on dimming type selected and is fully concealed within track.}$ 







## DRIFT 62

## MANUFACTURING OPTIONS

FIXTURE					DRIVER
CODE	FINISH	WATTAGE	ССТ	BEAM ANGLE	DIMMING
7054	WH - White	<b>15W</b> - 15 Watt	<b>27</b> - 2700K	<b>15</b> - 15° Spot	ND - Non-Dim
	BLK - Black		<b>30</b> - 3000K	<b>24</b> - 24° Narrow	1V - 0-10V
			<b>27/65</b> - 2700K-6500K	<b>38</b> - 38° Medium	DA - DALI
				<b>60</b> - 60° Wide	

Example Code: **7054\_15W\_BLK\_27\_38\_DA** 

60 degree beam angle as standard.
Full track system with suitable 48V DC power supply required.