



TOVOO


CLICK H 76

CLICK H 76 - 10W

MODULATED DOWNLIGHT SYSTEM - FIXED WITH DEEP BAFFLE

DATASHEET

TOVO

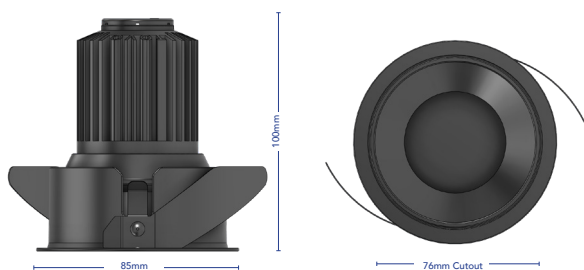

OVERVIEW

CODE	4888
ACCESSORY	Trimless Housing, Semi Trimless Housing Honeycomb Louvre, Linear Spread Lens, Frosted Lens
COLOUR TEMP	2700K, 3000K, 4000K, TW
BEAM ANGLE	60°, 36°, 24°, 15°
CRI	≥97
LUMEN OUTPUT	790Lm
WATTAGE	10W
FIXTURE CURRENT	250mA
DRIVER	Dedicated Driver Provided for Constant Current Selection, Remote Driver Required for 24V DC Selection
DIMMING	Phase, Touch, DALI
IP RATING	IP44
IC-RATING	IC-4
CUT OUT	76mm
RECESS DEPTH	100mm - Fixture 100mm - Dedicated Phase Driver 120mm - Touch, DALI Drivers 80mm - Dedicated TW DALI DT8 Driver

Notes:
All data stipulated are nominal values
based on 2700K with accuracy of +/- 5%.




TILT 25°



ROTATION
355°



IP44

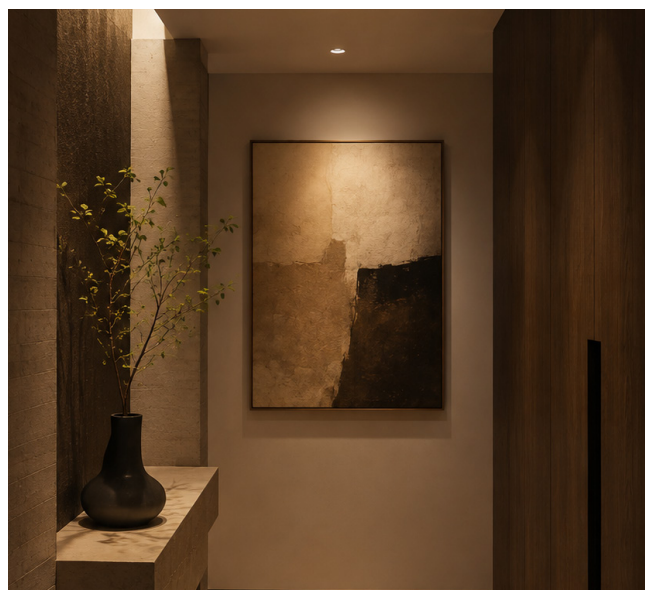

CLICK H 76 - 10W

MODULATED DOWNLIGHT SYSTEM - FIXED WITH DEEP BAFFLE

MANUFACTURING OPTIONS

TOVO

FINISH



WH
White



BLK
Black

ACCESSORY



OR
Open Ring



LS
Linear Lens



FL
Frosted Lens



HL
Honeycomb
Louvre

CCT



27
2700K



30
3000K



40
4000K



27/65
Tunable White

BEAM ANGLE



15
15° Lens



24
24° Lens




36
36° Lens




60
60° Lens

FRAME OPTIONS

ST
Semi Trimless



TL
Trimless***



FIXTURE						DRIVER
CODE	FINISH	FRAME	ACCESSORY	CCT	BEAM ANGLE	DIMMING
4888	WH - White	ST - Semi Trim	OR - Open Ring*	27 - 2700K	15 - 15° Spot	PH - Dedicated Phase Dim Driver Provided**
	BLK - Black	TL - Trimless	HL - Honeycomb Louver	30 - 3000K	24 - 24° Narrow	DA - Dedicated DALI DT6 Driver Provided**
			LS - Linear Spread Lens	40 - 4000K****	36 - 36° Medium	24V - Remote 24V Driver Required
			FL - Frosted Lens		60 - 60° Wide*	
				CCT	BEAM ANGLE	DIMMING
				27/65 - 2700K/6500K	15 - 15° Spot	TW - Dedicated DALI DT8 Driver Provided**
					24 - 24° Narrow	TW_24V - Remote 24V DC Driver Required, 2 Channels
					36 - 36° Medium	
					60 - 60° Wide*	

Example Code: **1234_WH_ST_OR_27_60_PH**

Notes:

*60 degree beam, Open Ring as standard.

**All dedicated Constant Current drivers are set at 250mA.


***Trimless frames are designed for plaster set ceilings only.

****4000K available on request, minimum order quantities may apply.

CLICK H 76 - 10W

TYPICAL CONNECTION DIAGRAMS


MODULATED DOWNLIGHT SYSTEM - FIXED WITH DEEP BAFFLE

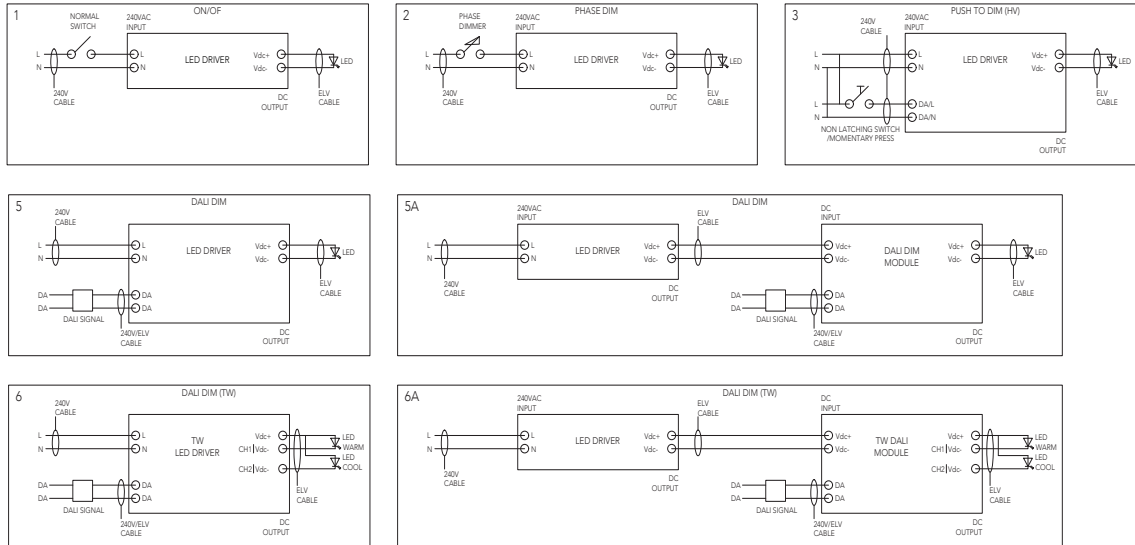

Dedicated Driver

One driver per fixture
Driver next to fixture


Typically DC Constant Current Fixtures



Remote Driver

Multiple fixtures per driver
Driver away from fixture

Typically 24V DC Constant Voltage Fixtures



240V Cables

Typical TPS cable to be used for AC wiring.
Electrician to calculate wire guage based on connected load and cable length.

ELV cables

Typical ELV cable with 24 strand count or higher to be used for DC wiring.
Electrician to calculate wire guage based on connected load and cable length.

Tunable White

For Tunable White CCT options with remotely located driver, 3 Core cable is required.



Online Cable Calculator
<https://tovolighting.com.au/cable-calculator/>