TOVO



NOOSA ROD

DESCRIPTION	Adjustable Spot With Rod Extension
CODES	2654
FINISHES	White, Black, Medium Bronze, Copper, Brass, Stainless Steel, Aged Copper, Aged Brass, Custom
COLOUR TEMP	2700K, 3000K
BEAM ANGLE	60, 38, 24
CRI	≥90
LUMEN OUTPUT	676Lm
WATTAGE	8W
FIXTURE VOLTAGE	24V DC Constant Voltage 240V AC
DIMMING	Based On Driver and Voltage Selection
DRIVER	Remote Driver Required for 24V DC Selection
DRIVER OPTIONS	Non-Dim, Phase, Touch, DALI
IP RATING	IP66


Notes:
All data stipulated are nominal values based on 2700K with accuracy of +/- 5%.


WHITE
BLACK
MEDIUM BRONZE
COPPER
AGED COPPER
STAINLESS STEEL
BRASS
AGED BRASS
CUSTOM

TILT
140^0

ROTATION
355^0

INGRESS
IP66

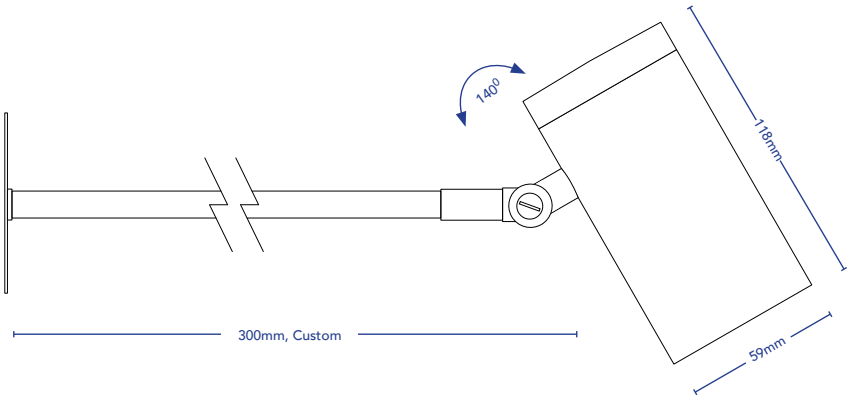



NOOSA ROD

ADJUSTABLE SPOT WITH EXTENSION

FINISH



WH White | BLK Black | MB Medium Bronze | SS Stainless Steel | CU Copper | AC Aged Copper | BR Brass | AB Aged Brass | CF Custom Finish

BACKPLATE TYPES



PFRN Premium Flat Round | PFSQ Premium Flat Square | PFRE Premium Flat Rectangular | FRN Flat Round | FSQ Flat Square | FRE Flat Rectangular

CCT



27 2700K | 30 3000K

BEAM ANGLE



24 24° Lens | 38 38° Lens | 60 60° Lens

FIXTURE							DRIVER
CODE	FINISH	BACK PLATE	ROD	CCT	BEAM ANGLE	VOLTAGE	DRIVER
2654	**SS** - Stainless Steel **WH** - White **BLK** - Black **MB** - Medium Bronze **CU** - Copper **AC** - Aged Copper **BR** - Brass **AB** - Aged Brass **CF** - Custom Finish	**PFRN** - Premium Flat Round **PFSQ** - Flat Flat Square **PFRE** - Flat Round **FRN** - Flat Square **FSQ** - Standard Backplate **FRE** - Flat Rectangular	**R3** - 300mm **CL** - Custom Length	**27** - 2700K **30** - 3000K	**24** - 24° Narrow **38** - 38° Medium **60** - 60° Wide	**24V** - 24V DC	**ND** - Non Dim **PH** - Phase* **DA** - DALI **TH** - Touch

Example Code: **2654_CU_FRN_R3_27_38_24V**


Notes:
* Phase Dimmable drivers are not recommended for 24V DC fixtures due to possible flickering, but can be provided upon request.


Hardware are visible screws are colour coordinated to the backplate finish. All backplates come with standard mounting screws.
BR, CU, AB, AC - Brass Pan-Head
SS - Stainless Steel Phillips-Head
WH, BLK, MB, CF - Colour Matched Phillips-Head


NOOSA ROD

ADJUSTABLE SPOT WITH EXTENSION

PREMIUM FLAT ROUND




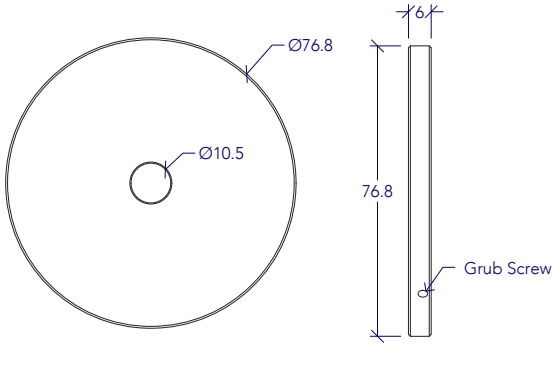





PARTS - 1 x Premium Backplate, 1 x Wall Plate, 2 x 10G x 30mm Countersunk Phillips Head Screws, 2 x Wall Plugs (8 x 40mm), 1 x Grub Screw (M3 x 10), 1 x Allen Key (1.5mm)

PREMIUM FLAT SQUARE



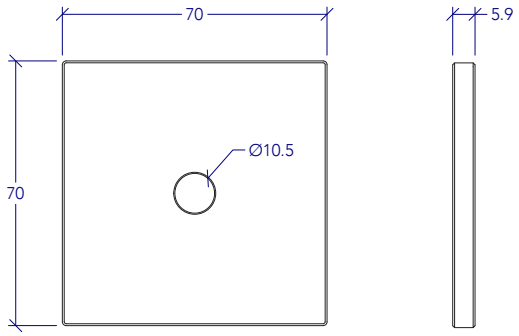


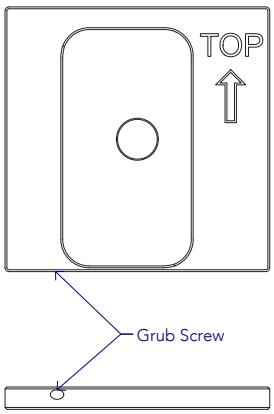



PARTS - 1 x Premium Backplate, 1 x Wall Plate, 2 x 10G x 30mm Countersunk Phillips Head Screws, 2 x Wall Plugs (8 x 40mm), 1 x Grub Screw (M3 x 10), 1 x Allen Key (1.5mm)

WALL PLATE










TOVO Lighting
726 Pittwater Road, Brookvale, NSW 2100 Australia
E: office@tovolighting.com.au
Ph: +61 2 9939 1122

NOOSA ROD

ADJUSTABLE SPOT WITH EXTENSION

PREMIUM FLAT RECTANGULAR




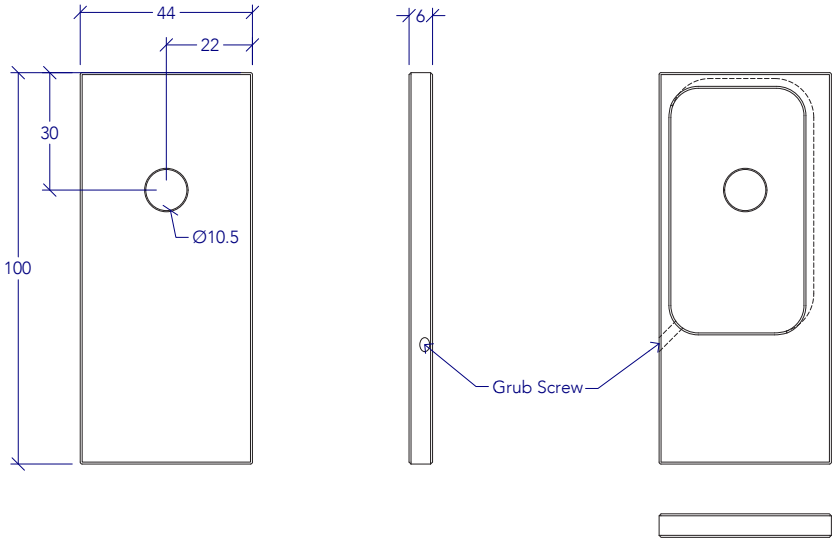

PARTS - 1 x Premium Backplate, 1 x Wall Plate, 2 x 10G x 30mm Countersunk Phillips Head Screws, 2 x Wall Plugs (8 x 40mm), 1 x Grub Screw (M3 x 10), 1 x Allen Key (1.5mm)

WALL PLATE



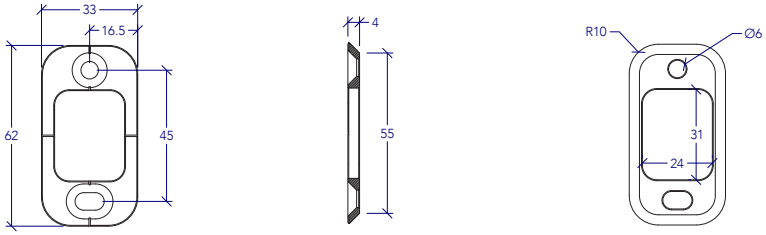



Installation Guide
https://tovolighting.com.au/tovo-backplate-installation-guidelines/

NOOSA ROD

ADJUSTABLE SPOT WITH EXTENSION

FLAT SQUARE

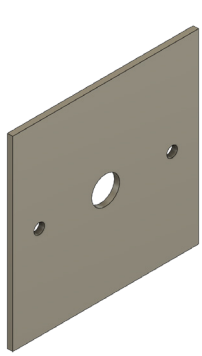


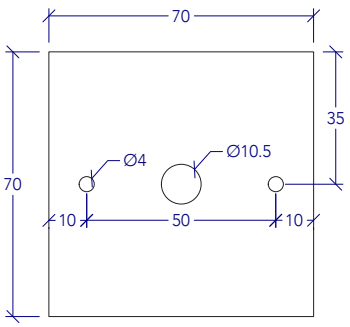





PARTS - 1 x Flat Backplate, 2 x 6G (3.5 x 25mm) Screws

FLAT ROUND








PARTS - 1 x Flat Backplate, 2 x 6G (3.5 x 25mm) Screws

FLAT RECTANGULAR



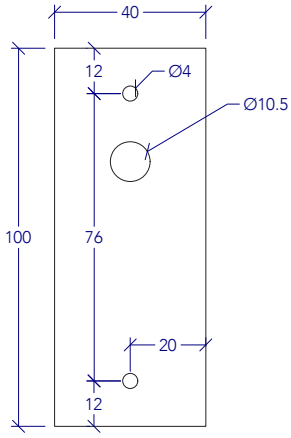



PARTS - 1 x Flat Backplate, 2 x 6G (3.5 x 25mm) Screws